
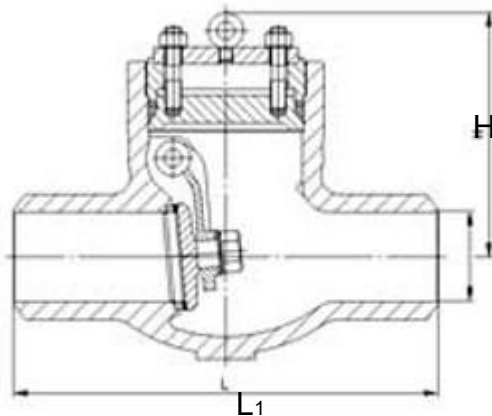


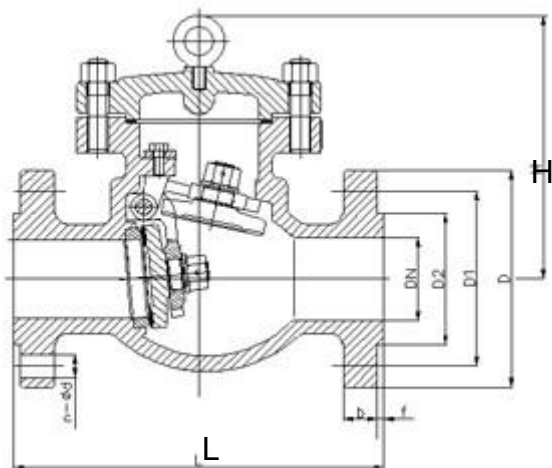

设计与制造：ASMEB16API 6D GB/T12236
法兰尺寸：ASME B16 5 JBZT79 GB/T9113
压力温度：-----

结构长度：ASMEB16.10 GB/T 12221
对焊连接培尺寸：-----
检验与试验：API 598 GB/T9131

安装尺寸及重量:

GB 20.0 Mpa										
DN	80	100	125	150	175	200	225	250	300	350
L ₁	305	406	483	559	700	711	850	864	991	1067
H	250	300	350	400	490	490	540	540	650	710
W _{t1}	45	80	115	180	300	370	400	430	630	810
GB 25.0 Mpa										
DN	80	100	125	150	175	200	225	250	300	
L ₁	305	406	483	559	700	711	850	864	991	
H	270	385	410	455	500	555	555	615	715	
W _{t1}	45	80	115	180	300	370	400	480	700	
GB 32.0 Mpa										
DN	80	100	125	150	175	200	225	250	300	
L ₁	305	457	533	610	700	762	850	914	1041	
H	305	310	380	425	470	500	510	570	570	
W _{t1}	60	100	120	180	320	400	430	520	780	
P ₅₄ 100 V										
DN	80	100	125	150	175	200	225	250	300	300
L	305	406	483	559	700	711	850	864	991	991
H	250	300	350	400	490	490	540	540	650	650
W _t	45	80	115	180	300	370	400	430	630	630
P ₅₄ 140V										
DN	80	100	125	150	175	200	225	250	300	
L	368	457	533	610	700	762	850	914	1041	
H	270	385	410	455	500	555	555	615	715	
W _t	45	80	115	180	300	370	400	480	700	
P ₅₄ 170 V										
DN	80	100	125	150	175	200	225	250	300	
L	368	457	533	610	700	762	850	914	1041	
H	305	310	380	425	470	500	510	570	570	
W _t	60	100	120	180	320	400	430	520	780	