

设计与制造: API 600 API 6D GB/T 12234


法兰尺寸: ASME B16.5 JB/T79 GB/T9113

压力温度: ASME B16.34

结构长度: ASME B16 10 GB/T 12221

对焊连接尺寸: ASME B16.25

检验与实验: API 598 GB/T26480

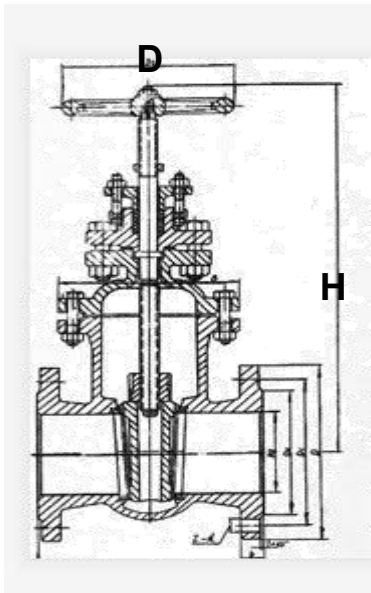

ANSI 150

NPS	2	2½	3	4	6	8	10	12	14	16	18	20	24
L	178	190	203	229	267	292	330	356	381	406	432	457	508
H	400	490	510	585	775	955	1160	1375	1570	1765	1980		—
D _o	200	200	250	300	350	350	400	450	500	600	700	—	—
W _t	23	45	50	63	108	171	263	346	488	621	814	—	—

-
PN16

DN	50	65	80	100	150	200	250	300	350	400	450	500	600
L	250	265	280	300	350	400	450	500	550	600	650	700	800
H	415	450	530	605	850	1060	1225	1415	1630	1780	2050	—	—
D _o	240	240	280	300	350	400	450	500	500	600	720	—	—
W _t	22	30	44	47	96	160	228	300	388	566	900	—	—

设计与制造: API 600 API 6D GB/T 12234

法兰尺寸: ASME B16.5 JB/T79 GB/T9113


压力温度: ASME B16.34

结构长度: ASME B16 10 GB/T 12221

对焊连接尺寸: ASME B16.25

检验与实验: API 598

ANSI 300

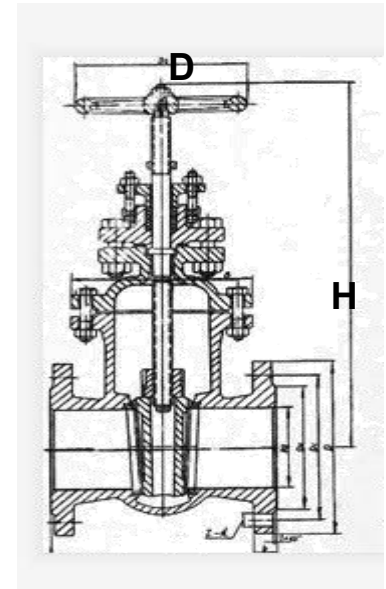

NPS	2	2½	3	4	6	8	10	12	14	16	18	20	24
L	216	241	283	305	403	419	457	502	762	838	914	991	1143
H	470	525	535	635	805	1025	1230	1460	1645	1840	—	—	—
D _o	200	200	300	300	350	400	450	500	600	600	—	—	—
w _t	30	44	61	77	153	286	412	576	886	1175	—	—	—
PN25													
DN	50	65	80	100	150	200	250	300	350	400	450	500	600
L	250	265	280	300	350	400	450	500	550	600	650	700	800
H	415	450	565	590	880	1040	1260	1415	1630	1780	— J	—	—
D _o	240	240	280	320	400	400	450	500	500	600	— J	—	—
w _t	23	32	46	67	112	218	290	324	423	566	—	—	—

PN40

DN	50	65	80	100	150	200	250	300	350	400	450	500	600
L	250	280	300	350	450	550	650	750	850	950	1050	1150	—
H	410	565	590	590	885	1065	1250	1530	1700	—	—	—	—
D _o	240	280	320	320	400	500	550	640	640	—	—	—	—
w _t	28	35	47	68	150	235	374	550	890	—	—	—	—
PN64													
DN	50	65	80	100	150	200	250	300	350	400	450	500	600
L	250	280	310	350	450	550	650	750	850	950	—	—	—
H	505	545	605	665	980	1120	1330	1680	—	—	—	—	—
D _o	280	280	320	400	450	55	550	640	—	—	—	—	—
w _t	44	64	84	119	266	388	500	550	—	—	—	—	—

设计与制造: API 600 API 6D GB/T 12234


法兰尺寸: ASME B16.5 JB/T79 GB/T9113

压力温度: ASME B16.34

结构长度: ASME B16 10 GB/T 12221

对焊连接尺寸: ASME B16.25

检验与实验: API 598 JB/T 9092

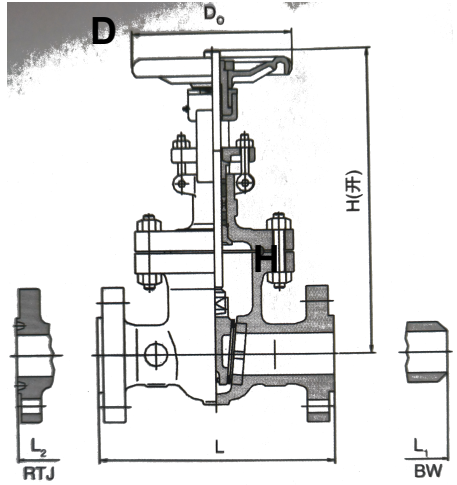

ANSI 600									ANSI 900					
NIPS	2	2½	3	4	6	8	10	12	2	2½	3	4	6	8
L/L1	292	330	356	432	559	660	787	838	368	419	381	457	610	737
L2	295	333	359	435	562	664	791	841	371	422	384	460	613	740
H	474	530	547	703	913	1077	1276	1499	620	705	695	825	1065	1318
DO	250	250	300	350	450	500	600	680	300	350	350	400	500	600
Wt	37	54	70	110	220	400	600	780	59	79	115	198	303	407
Wt1	32	47	64	103	218	374	570	830	53	71	103	178	271	366
PN100									PN150					
DN	50	65	80	100	150	200	250	300	50	65	80	100	150	200
L	250	280	310	350	450	550	650	750	300	340	390	450	600	750
H	505	545	605	665	980	1320	1580	1810	612	677	686	750	997	1153
Do	280	280	320	400	450	550	550	640	360	360	400	450	640	720
wt	48	65	85	120	268	446	535	670	73	110	141	185	462	711